

## CONTROLLED EXIT PANIC DEVICE IN STAINLESS STEEL

Panic Device Series

*This heavy duty rim type touchbar controlled exit panic device with a rugged, full stainless steel construction. It provides superior performance in meeting high standard of quality and reliability. It is designed and manufactured in accordance with international standard. - CE & UL Listed "Controlled Exit Panic Device". Tested in accordance to ANSI A156.3, 1984, Grade 1 Lock.*

### TOUCHBAR PANIC DEVICE - CMP400 SERIES

Half length touch bar



CMP401



CMP406

Full length touch bar






CMP402



CMP407



CMP436

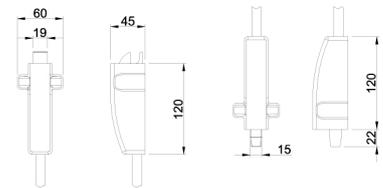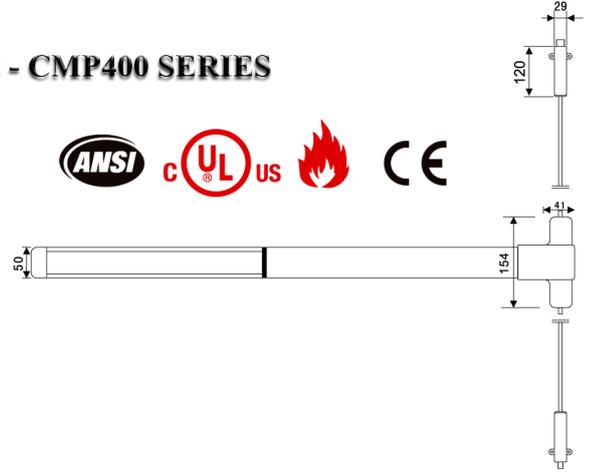

Top and bottom bolt for CMP436

Applicate in container data center

Feature	CMP401	CMP406	CMP436	CMP402	CMP407
Lock point	1	2	2	1	2
Touch bar	Half length of device			Full length of device	
Device for door width	24: 24"(610 mm)			24: 24" (610 mm)	
	36: 28" to 36" (711mm to 914 mm)			36: 28" to 36"(711mm to 914 mm)	
	48": 34" to 48" (864 mm to 1219 mm)			48: 34" to 48"(864 mm to 1219 mm)	
Device for door height	Standard rods accommodate 84" (2134mm)				
	Extension rods for 96" (2438mm)				
	Special rods for 120" (3048mm)				
Fasteners & sex bolts	Screw pack for 1 3/4" (44mm) to 2 1/4" (57mm) thick metal or wood doors				
Trim lock tumbler	Cross shape ⊕				
Dogging	Hex key dogging				
Trim	CMPA004/104/401/410/420/801				