



AD200-RH/LH Offset pivot

Suitable for wooden doors and steel doors
Precision bearings for smooth operation with dust proof.



Certificate:
ANSI/BHMA 156.4, Grade 1.

1. Load capacity: 550 pounds (250KGS)
2. Adjustable for 4.5mm in vertical direction.
3. Handed
4. Minimum door thickness: 45mm
5. Material: stainless steel (SUS 304)
6. Finish: SSS, PVD, PS
7. Notes:
 - A) Doors up to 90" (2286mm) in height should use one intermediate pivot.
 - B) Each additional 30" (762mm) warrants another intermediate pivot.
 - C) NFPA 80, Section 3-3.8 requires intermediate pivot on fire door applications.
 - D) Use for door weight over the pivot set limit.
One additional intermediate pivot for every additional 100lbs(45kg).

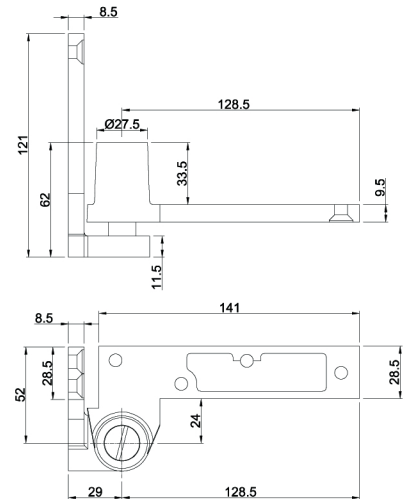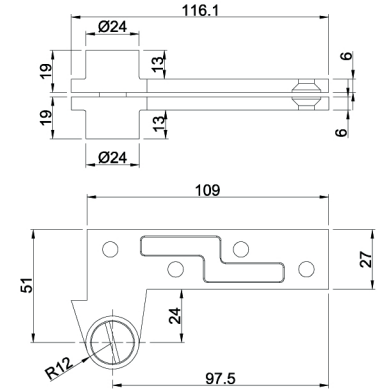

AD200-2-RH/LH, Intermediate pivot

Handed
Use with AD200
Vertical adjustment 4.5mm, includes positive locking
Material: stainless steel (SUS 304)

