

SPECIFICATION: Exit Lockcase

E800T

72-60T / 72-65T

Case: Stamped steel, 1.5mm thick, Zinc plated,
165mm x 85/90/95mm x 15mm

Front plate: SUS304 stainless steel 3mm thick,
front standard size is 235mm x 24mm in square.

Latch: SUS304 stainless steel, 13mm throw, reversible
Deadbolt: SUS304 stainless steel, 20.5mm, single
throw projection.

Follower: lever support springs on square 8mm spindle.

Backset: 60mm or 65mm available.

Applicable: wooden door / steel door


Handing: non-handed, field reversible

Finish: Satin stainless steel (32D)

Lockcase prepared fitted for Euro-profile cylinder
and standard fixings.

Function: Latch by lever either side except when lever
locked or unlocked by key. Inside always open and inside
lever retracts latch and deadbolt simultaneously.

Standard: Certified by EN12209 & EN1634-1, 4 hours fire rated,
EN179 certificate

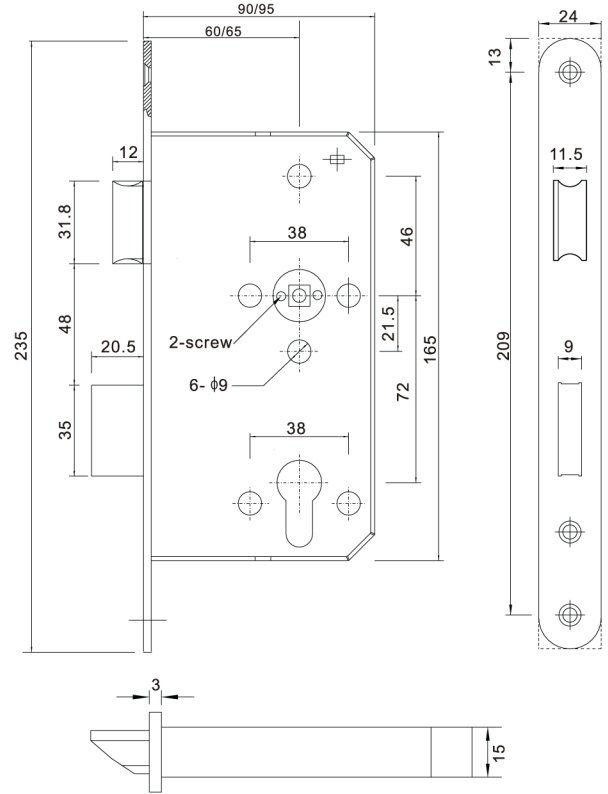

SPECIFICATION: Night Latch Lockcase

E810

5572 / 6072 / 6572

Case: Stamped steel, 1.5mm thick, Zinc plated,
165mm x 85/90/95mm x 15mm

Front plate: SUS304 stainless steel 3mm thick
front standard size is 235mm x 24mm in square-end
(round-end optional).

Latch: SUS304 stainless steel, 13mm throw, reversible
Auxiliary latch: SUS304 stainless steel 3mm thick,
7mm throw.

Follower: lever support springs on square 8mm spindle.

Backset: 55mm, 60mm or 65mm available.

Applicable: wooden door / steel door

Handing: non-handed, field reversible

Finish: Satin stainless steel (32D)

Lockcase prepared fitted for Euro-profile cylinder
and standard fixings.

Function: Latch by lever or key. Auxiliary latch deadlocks
latch. Inside always open.

Standard: Certified by EN12209 & EN1634-1, 4 hours fire rated

