

### SPECIFICATION: Entrance Lockcase

#### E800

5572 / 6072 / 6572 / 7072 / 8072

Case: Stamped steel, 1.5mm thick, Zinc plated,  
165mm x 85/90/95mm x 15mm

Front plate: SUS304 stainless steel 3mm thick,  
front standard size is 235mm x 24mm in square-end  
(round-end for optional).

Latch: SUS304 stainless steel, 13mm throw, reversible

Deadbolt: SUS304 stainless steel, 20.5mm (max.)  
double throw projection.

Followers: lever support springs on square 8mm spindle.

Backset: 55mm / 60mm / 65mm / 70mm / 80mm available.

Applicable: wooden door / steel door


Handing: non-handed, field reversible

Finish: Satin stainless steel (32D)

Lockcase prepared fitted for Euro-profile cylinder  
and standard fixings.

Function: Latch by lever both side. Deadbolt by key  
outside or thumb turn inside.

Standard: Certified by EN12209 & EN1634-1, 4 hours fire rated

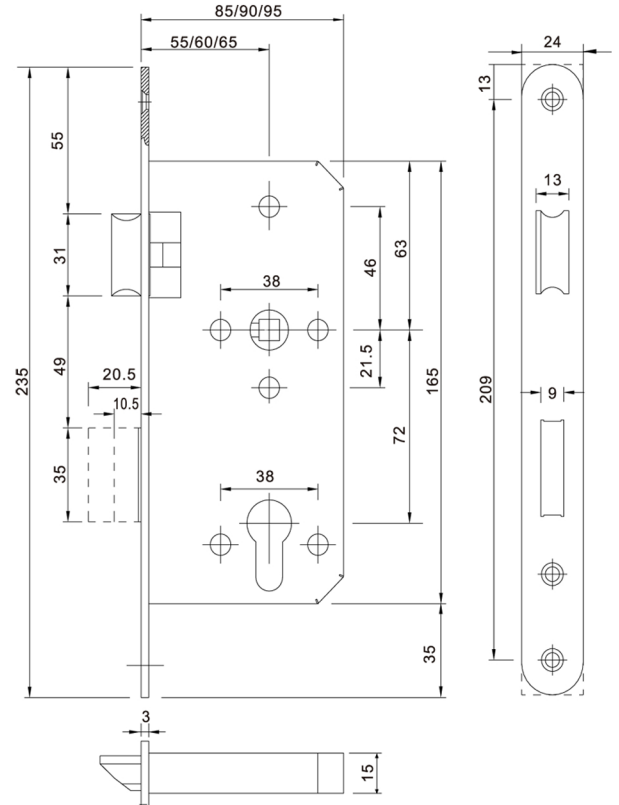

### SPECIFICATION: Bathroom Lockcase

#### P800

5578 / 6078 / 6578

Case: Stamped steel, 1.5mm thick, Zinc plated,  
165mm x 85/90/95mm x 15mm

Front plate: SUS304 stainless steel 3mm thick  
front standard size is 235mm x 24mm in square-end  
(round-end for optional).

Latch: SUS304 stainless steel, 13mm throw, reversible

Deadbolt: SUS304 stainless steel, 20.5mm, single  
throw projection.

Followers: lever support springs on square 8mm spindle,  
the second square 8mm spindle below for privacy set.

Backset: 55mm / 60mm / 65mm available.

Applicable: wooden door / steel door

Handing: non-handed, field reversible

Finish: Satin stainless steel (32D)

Lockcase prepared fitted for standard fixings.

Function: Latch by lever both side. Deadbolt by  
emergency release outside or thumb turn inside.

Standard: Certified by EN12209 & EN1634-1, 4 hours fire rated

